

TECHNICAL DATA SHEET

ETCH AWAY C

For Concrete

• Eco-Friendly • Removes Unsightly Efflorescence • Powerful Cleaner • Degreaser • Etcher

PRODUCT DESCRIPTION:

Calico Etch AWAY-C is an ECO-friendly, safe and easy alternative to traditional acid washing. It's used as a concrete etcher, degreaser, and cleaner. Calico Etch AWAY-C is ideal for surface preparation prior to the application of Overlays, Micro Toppings, Spray Decks, Paints, Stains, Sealers, etc. It's low fuming and water soluble with low odor and zero VOC. Calico Etch AWAY-C is biodegradable and safe to use around plants and other vegetation eliminating dangerous toxic fumes and potential acid burns associated with muriatic or phosphoric acid concrete etchers.

Technical Data

Color in container: Clear

VOC: Zero

Solids: 22%

Density: 8.71 lbs/gallon

pH: 0.1 to 1

Viscosity: Thin

Odor: Negligible

Storage: Cool dry place between 50 and 100°F.


Shelf Life: 2 years

Packaging: 1 gallons and 5 gallons

SUGGESTED USES:

Calico Etch AWAY-C is used to clean and prepare concrete, brick, Mexican Saltillo tile, grout, interlocking pavers, stucco, and natural stone before applying various surfaces, paints, stains or sealers. It can also remove the white chalky deposits on concrete called efflorescence.

INSTRUCTIONS FOR USE:

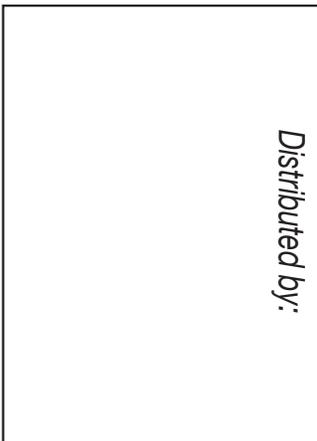

Calico Etch AWAY-C should be liberally applied using a Chapin Sprayer to the substrate of fresh (7 to 28 days old) or aged concrete, brick, Saltillo Tile, etc. It is recommended that Calico Etch AWAY-C not be applied in direct sunlight. The surface should be kept moist for approximately 30 minutes and then the product should be allowed to dry thoroughly. This will allow the product to react properly. The surface will turn completely white as the calico Etch AWAY-C dries completely.

To remove Calico Etch AWAY-C, use a high pressure washer or wet the area and rinse with a hose using a stiff nylon brush and scrub while rinsing. Pressure wash or rinse the area completely. The surface may require 2 treatments until desired etching is achieved. Surface must be completely dry and free of dust. Wait at least 24 hours before applying Calico sealers or coatings.

COVERAGE RATE

One gallon of Calico Etch AWAY-C will cover approximately 100 to 500 square feet of bare concrete and 50 to 400 square feet of paver tiles. Coverage rates will depend on surface porosity.

CLEANING EQUIPMENT

Equipment and hands may be cleaned with mild liquid detergent and water. Disposal of any unused material, if desired, must comply with Local, State and Federal regulations.

PRECAUTIONS

Read entire label before using. As a precaution wear rubber gloves and eye protection. Calico Etch AWAY-C could freeze below 50°F. Containers should be kept in a cool dry space between 50 and 100°F. Calico Etch AWAY-C is incompatible with chlorine bleach and ammonia.

WARRANTY:

This product is not intended for public use and is intended for use by licensed contractors and installers, experienced and trained in the use of these products. It is warranted to be of uniform quality, within manufacturing tolerances. The manufacturer has no control over the use of this product, therefore, no warranty, expressed or implied, is or can be made either as to the effects or results of such use. In any case, the manufacturer's obligations shall be limited to refunding the purchase price or replacing material proven defective. The end user shall be responsible for determining suitability and assumes all risks and liability.

